


Hassco

Used Oil Tanks

Double-Wall

1. Lockable Overfill Box c/w debris screen and 2" fitting with suction tube
2. Emergency Vent
3. Lift Lug
4. ULC Label
5. 1 1/2" Threaded Fitting
6. 2" Threaded Fitting
7. Emergency Vent (interstice)
8. Vacuum Gauge
9. 1" Drain
10. Legs
11. Steps (on 500-1000gal tanks)

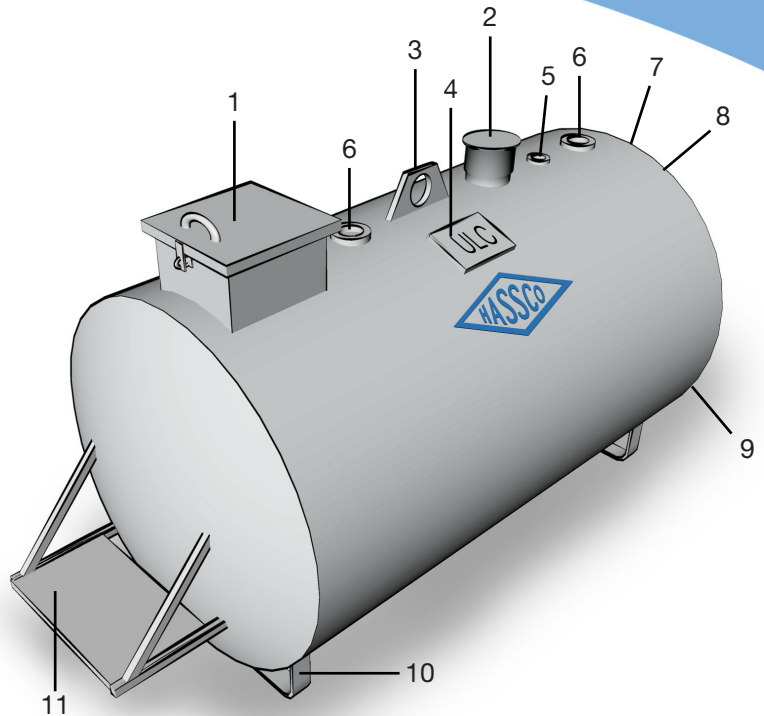

Material (gauge)	Capacity	Diameter	Length + Step	Weight
12	450L/100G	30"	48"	475lbs.
12	1100L/250G	38"	60"	725lbs.
12	1360L/300G	38"	72"	775lbs.
12	2200L/500G	50"	72" + 12"	1090lbs.
12	4500L/1000G	50"	144" + 12"	2000lbs.

General Information

HASSCO's Double-Wall tank is ideal for used oil storage! These tanks are an industry proven, cost effective way to store various used products and are built with specific modifications for the collection of such. These ULC approved tanks are made solely for the collection of used oils which can be pumped out as needed. All tanks come with 4 threaded openings, a fill cap, emergency/normal venting and a lockable spill-box with a debris screen for manual dumping. Our Double-Wall tanks come standard with a 340 degree wrap and is continually monitored through the vacuum gauge installed into the head of the tank. All HASSCO tanks are phosphate washed prior to applying a high build metal treatment and two top coats of enviro-smart water based paint. Other coating options such as epoxy and powder are available upon request.

Options

- Tank gauges, alarms, liners, heaters and pumping systems
- Powder Coating

Sizing

- Up to 4500L/1000G

Conformity

- ULC S652